
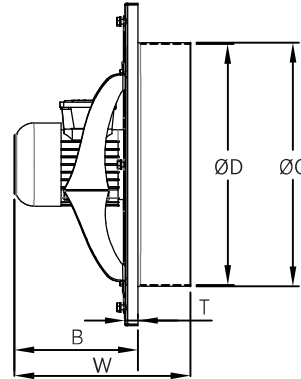


- Ø400-630 mm aralığında 5 farklı çapta
- Doğrudan duvara kolay ve hızlı montaj
- Epoksi boyalı gövde ve elemanları
- Alüminyum alaşımlı fan göbeği
- F sınıfı izolasyonlu, IP 55 elektrik alüminyum motor
- VD 400 ve VD 450 model için çalışma sıcaklığı -20°C / +40°C,
- Diğer tüm VD modeller için çalışma sıcaklığı -20°C / +60°C'dir.
- 400 V, 3 Faz, 50 Hz Motor
- Besleme voltajının toleransı +-15%'dir.

- 5 standard sizes in the range of Ø400-630 mm
- Easy and quick mounting on the wall
- The casing and its relevant parts are epoxy coated
- Die cast aluminum alloy fan hubs
- Providing feasible solution for ventilation systems requiring high air flow and low pressure
- Electrical motors with IP55 and F class insulation
- Operating temperature between -20°C and 40°C for VD 400 and VD 450
- Operating temperature between -20°C and 60°C for VD 500, VD 560 and VD 630
- 400 V, 3 Phase, 50 Hz Motor
- The tolerance is +- 15% for the supply voltage.

Statik (Pa) Static (Pa)	HAVA DEBİSİ (m³/h) / AIR FLOW				
	VD 400	VD 450	VD 500	VD 560	VD 630
0	4.225	7.311	8.932	12.420	18.062
25	3.979	6.860	8.510	11.900	17.363
50	3.705	6.311	8.049	11.340	16.622
75	3.386	5.665	7.534	10.726	15.829
100		4.996	6.941	10.044	14.966
125			6.221	9.268	14.004
150					12.887
175					11.472
200					8.773

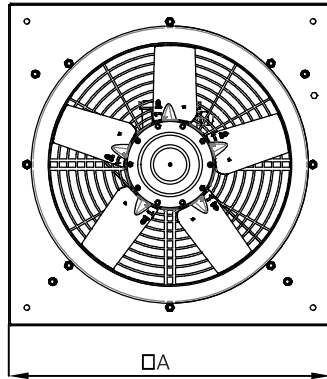

VENCO MODEL	Akım Current (A)	Güç Power (kW)	Voltaj Voltage (V)	Devir Revolution (rpm)	Ağırlık Weight (kg)	A	B	ØC	ØD	W	T
VD 400	0,9	0,25	400	1440	12,33	535	205	404	400	293	20
VD 450	1,2	0,37	400	1440	14,43	585	205	454	450	293	20
VD 500	1,47	0,55	400	1440	20,50	655	255	504	500	342	20
VD 560	1,94	0,75	400	1440	23,15	715	255	564	560	342	20
VD 630	3,39	1,50	400	1440	33,40	795	255	634	630	445	20